

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/015875 A1

(51) International Patent Classification⁷: **H04L 29/06**,
H04Q 7/38

(74) Agent: **RIEBLING, Peter**; Postfach 31 60, 88113 Lin-
dau/B. (DE).

(21) International Application Number:
PCT/EP2004/008574

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(22) International Filing Date: 30 July 2004 (30.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03017348.8 31 July 2003 (31.07.2003) EP

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): **T-MO-
BILE DEUTSCHLAND GMBH** [DE/DE]; Langrab-
weg 151, 53227 Bonn (DE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **BLICKER, Stephan**
[DE/DE]; Auf dem Grevel 7, 53343 Wachtberg-Villip
(DE). **BRITSCH, Matthias** [DE/DE]; Steinweg 4a, 53639
Königswinter (DE).

Published:

— with international search report

[Continued on next page]

(54) Title: TRANSPARENT ACCESS AUTHENTICATION IN GPRS CORE NETWORKS

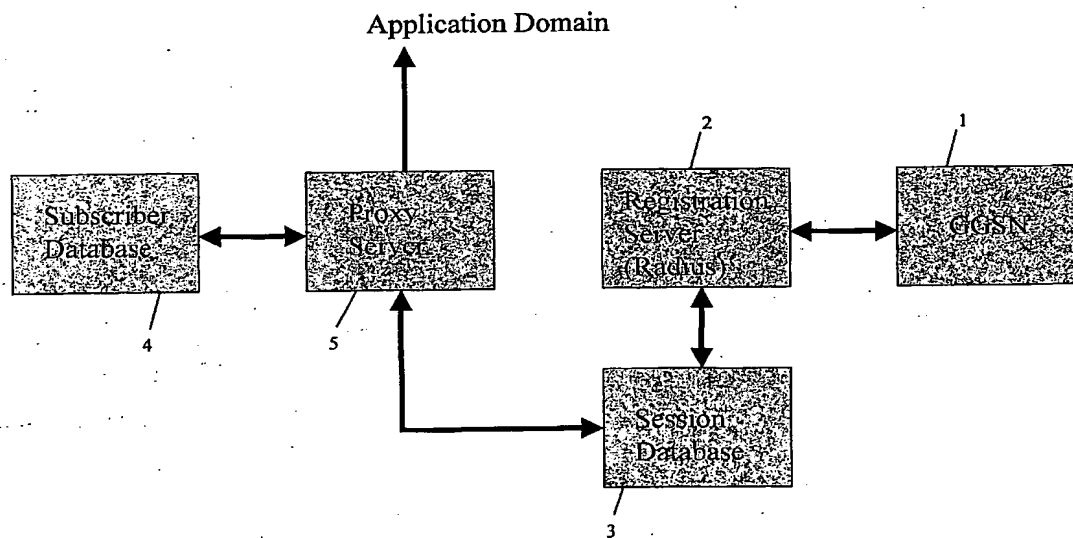

(57) Abstract: The present invention relates to a method for application layer authentication of subscribers connected to the au-
thenticating network domain by a 2G or 2.5G GPRS core network or a 3G UMTS network, characterised by using data which are
assembled by the network layer during establishment of a PDP context in GPRS networks. The invention comprises System of units
in a mobile telecommunication network, including at least a first authentication unit which is connected via a data line to a second
unit which assembles data according to the described method.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.